



Rysunki wymiarowe

Przełączniki z napędem ręcznym

Wskazanie pozycji przełącznika dla OT_160...2500_

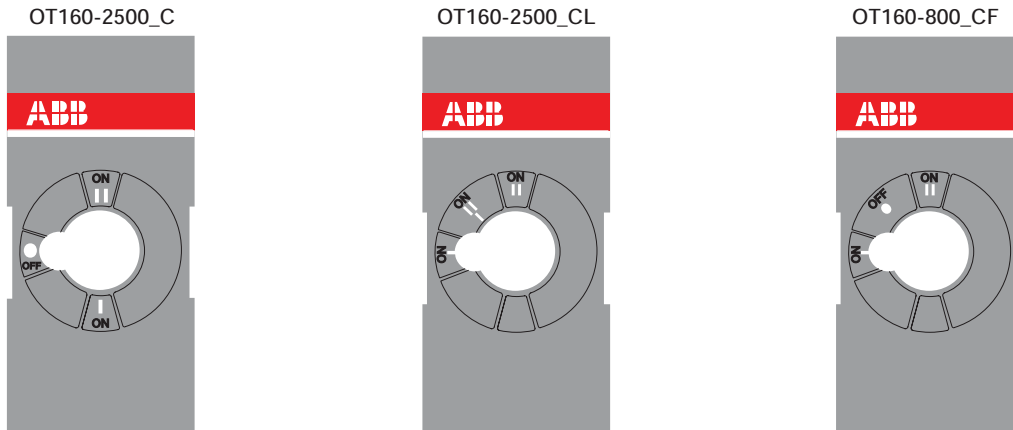

OT160...OT250E03/04C_P

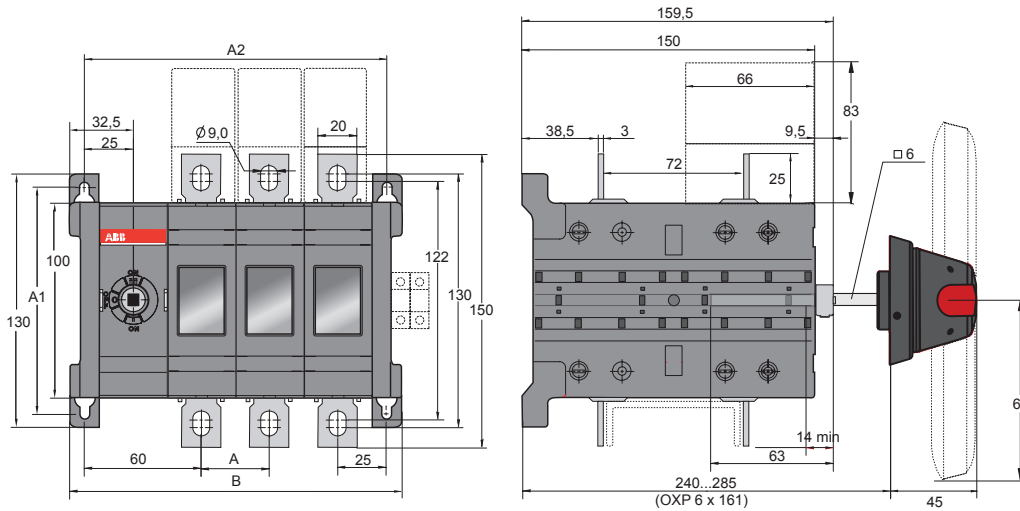


OT160...250_C_

[mm]	E02	E03	E04
A	35	35	35
A1	116	116	116
A2	120	155	190
B	135	170	205

Rysunki wymiarowe

Przełączniki z napędem ręcznym


OT160...OT250E12/13/33C_P

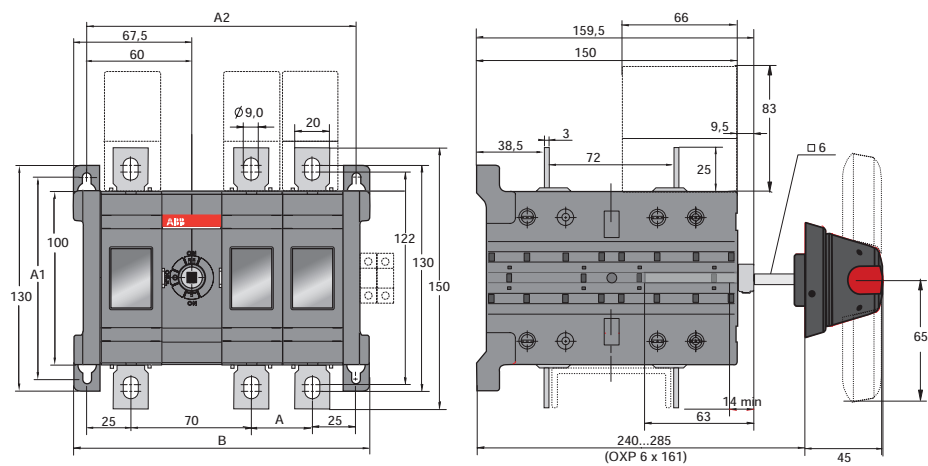

OT160...250_C_

[mm]	E12	E13	E22	E23	E33
A	35	35	35	35	35
A1	116	116	116	116	116
A2	155	190	190	225	260
B	170	205	205	240	275

OT160...OT250E03/04WC_P

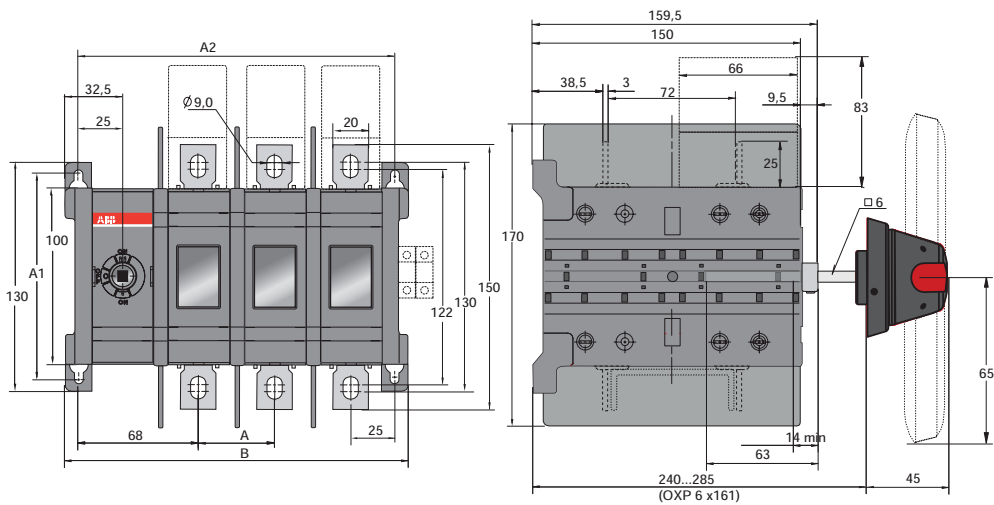


OT160...250_WC_

[mm]	E02	E03	E04
A	43	43	43
A1	116	116	116
A2	136	179	222
B	151	194	237

Rysunki wymiarowe

Przełączniki z napędem ręcznym


OT160...250E03/04_ z rączką mocowaną bezpośrednio

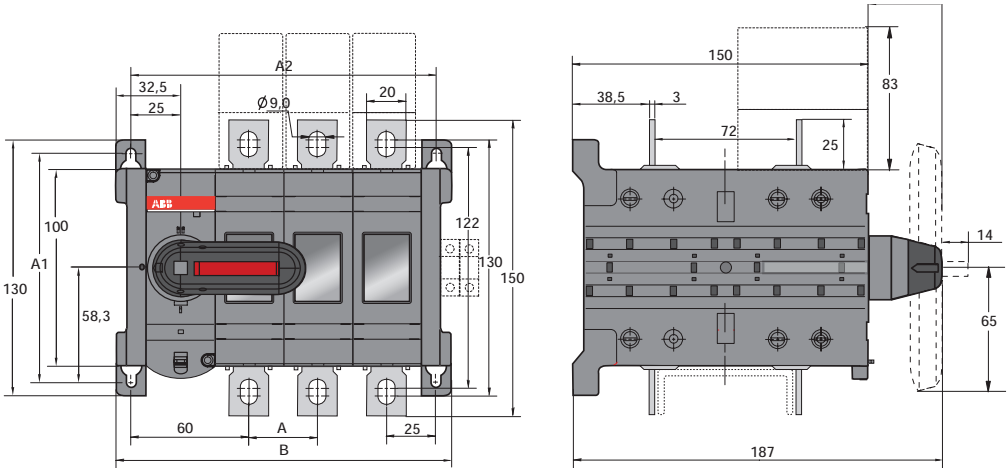

OTM160...250_C

[mm]	E03	E04
A	35	35
A1	116	116
A2	156	191
B	171	206

OT315...400E03/04C_P

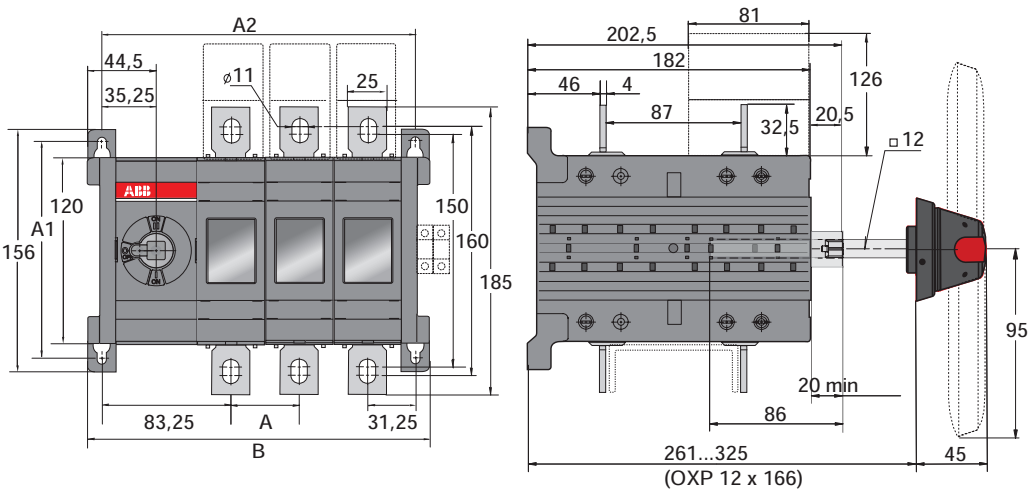


OT315...400_C_

[mm]	E02	E03	E04
A	44	44	44
A1	142	142	142
A2	158,5	202,5	246,5
B	177	221	265

Rysunki wymiarowe

Przełączniki z napędem ręcznym


OT315...OT400E12/13/33C_P

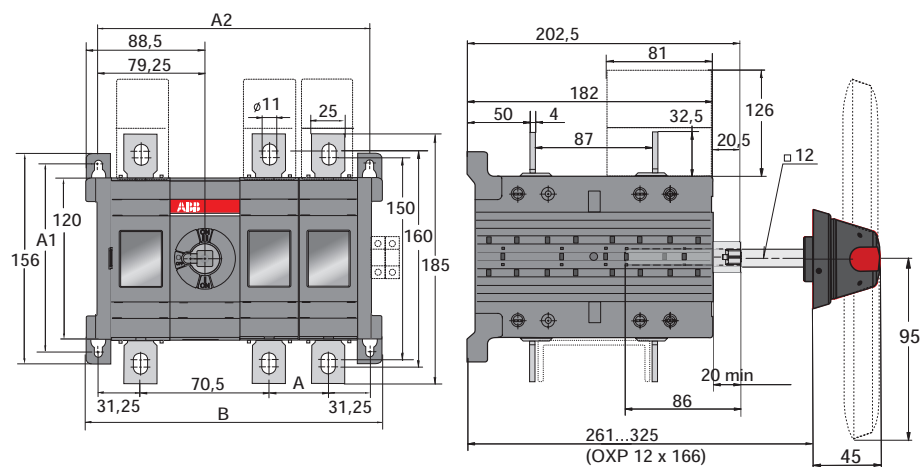

OT315...400_C_

[mm]	E12	E13	E22	E23	E33
A	44	44	44	44	44
A1	142	142	142	142	142
A2	202,5	246,5	246,5	290,5	334,5
B	221	265	265	309	253

OT315...400E03/04_ z rączką mocowaną bezpośrednio

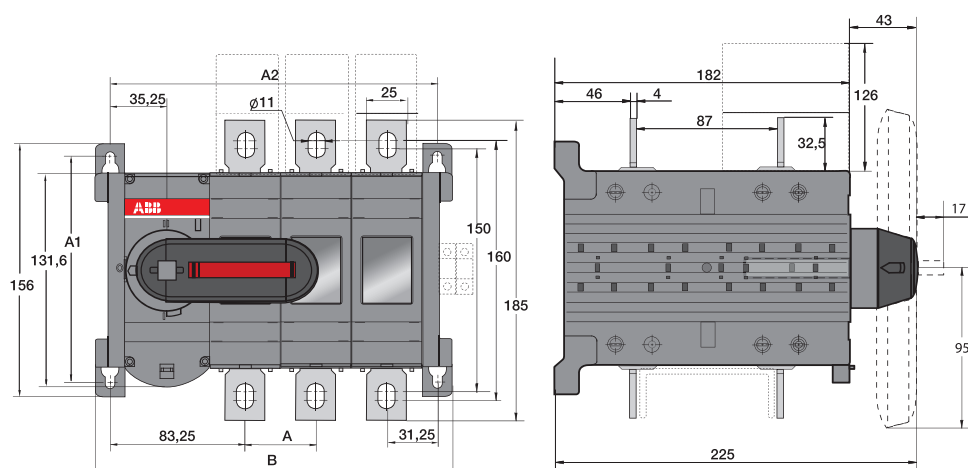


OT315...400_C

[mm]	E03	E04
A	44	44
A1	142	142
A2	202,5	246,5
B	221	265

Rysunki wymiarowe

Przełączniki z napędem ręcznym


OT630...800E03/04C_P

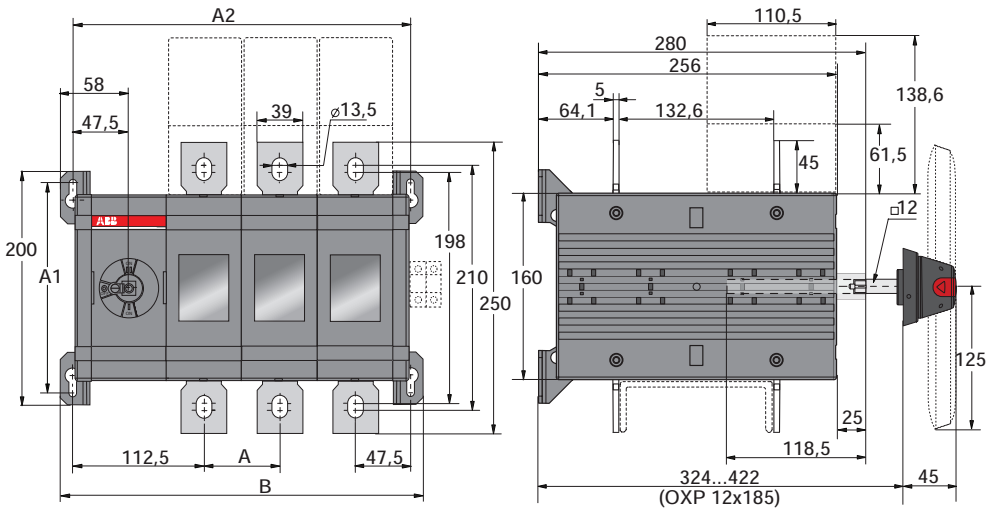

OT630...800_C_

[mm]	E02	E03	E04
A	65	65	65
A1	180	180	180
A2	225	290	355
B	246	311	376

OT630...800E12/13/33C_P

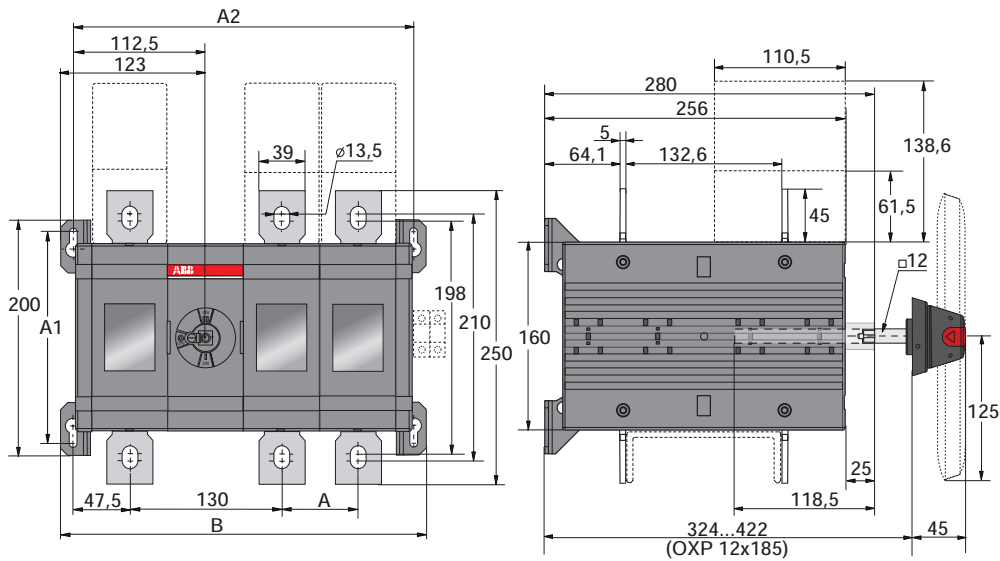


OT630...800_C_

[mm]	E12	E13	E22	E23	E33
A	65	65	65	65	65
A1	180	180	180	180	180
A2	290	355	355	420	485
B	311	376	376	441	506

Rysunki wymiarowe

Przełączniki z napędem ręcznym


OT630...800E03/04_ z rączką mocowaną bezpośrednio

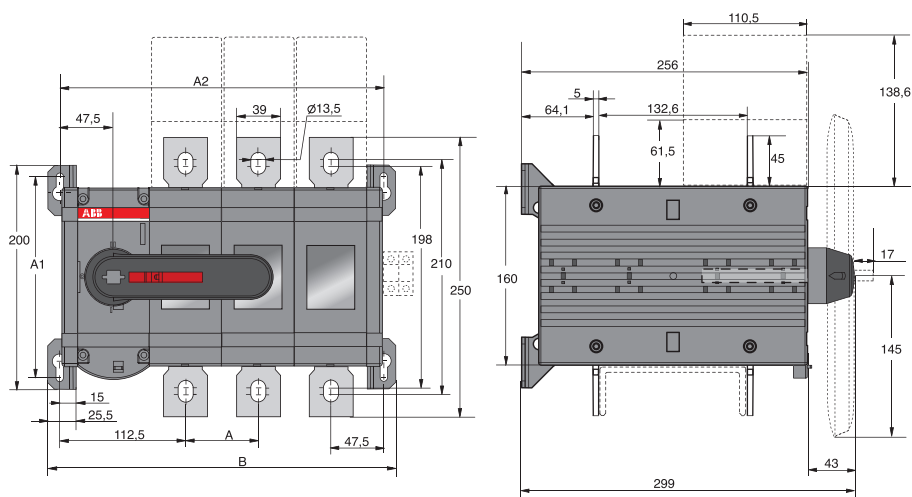

OT600...800_CK

[mm]	E03	E04
A	65	65
A1	180	180
A2	290	355
B	311	376

OT1000...1600E03/04CP

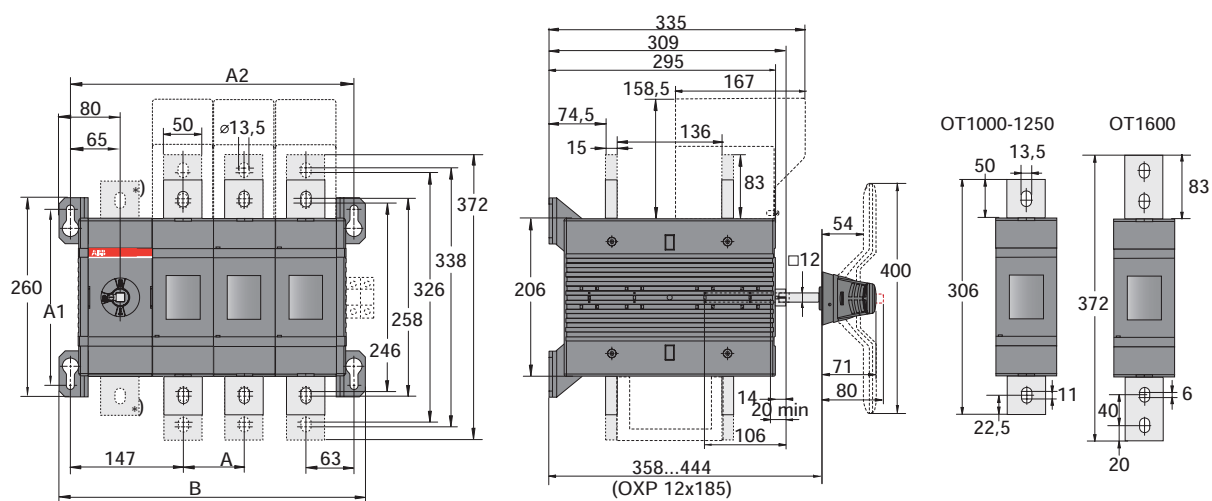

*) typy N3

OT1000...1600_C_

[mm]	E02	E03	E04
A	80	80	80
A1	230	230	230
A2	290	370	450
B	320	400	480